

**PRECISION FIT**  
Made in over  
500 sizes and  
thread patterns



**STAINLESS  
STEEL SPRING**  
Compatible with  
all fluids



**FEMCO**  
**NO-SPILL DRAIN SYSTEM**

**SINGLE BRIDGE**  
For faster flow  
and better removal of  
contaminants

**OIL PAN THREADS**  
Machined full length for  
maximum strength and  
security


**VITON O-RING**  
Compatible  
with all fluids

**DUST CAP**

**O-RING SEALS**




**DRAINER**  
Simple thread-on  
connection.  
One size fits all

**WORKS WITH  
GRAVITY OR SUCTION  
SYSTEMS**

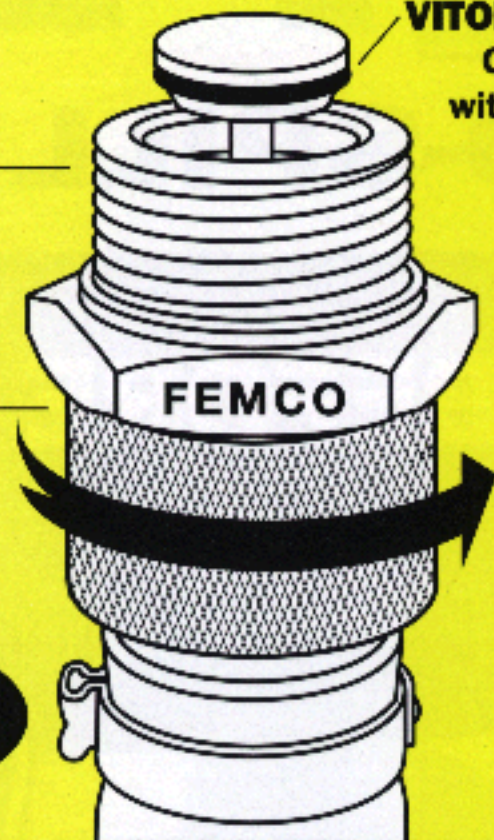

## WITH FEMCO DRAIN SYSTEMS

### YOUR NEXT OIL CHANGE IS AS EASY AS 1 - 2 - 3

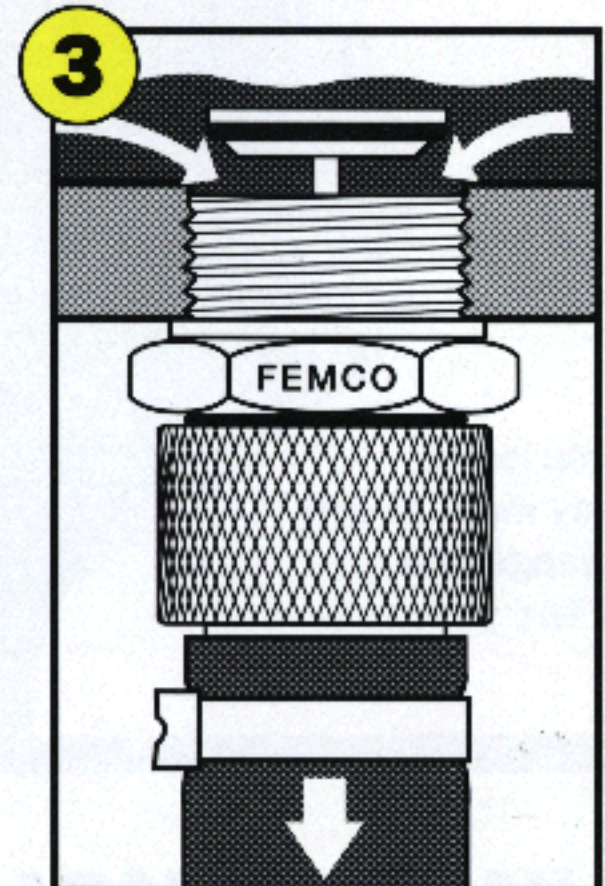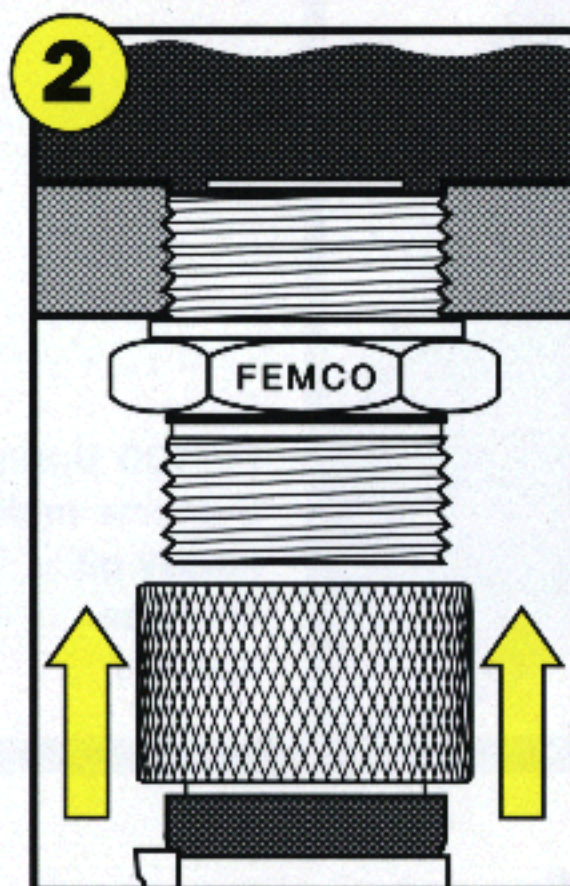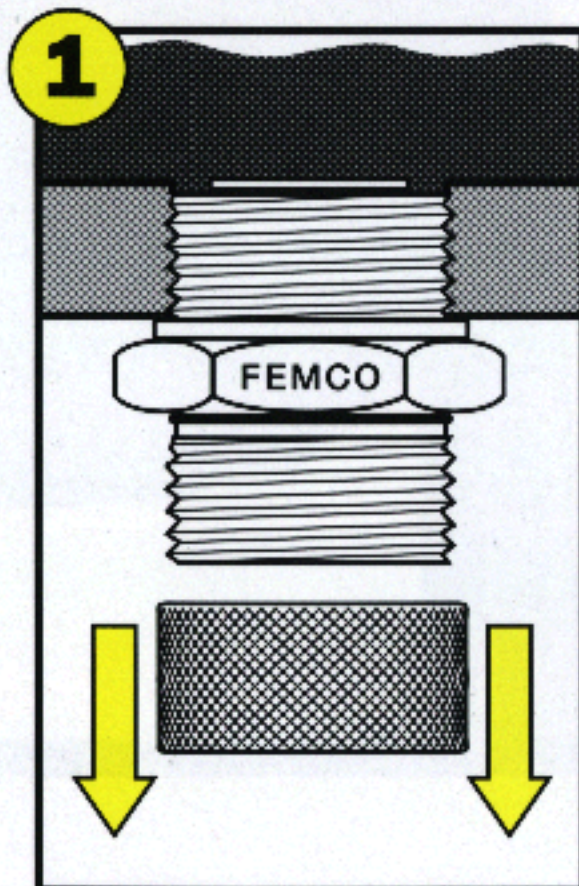

- 1. FEMCO STANDARD DESIGN** simply replaces the factory plug. No special tools to install. Dustcap ensures clean, smooth operation.
- 2. REMOVE DUST CAP** - the spring loaded pop-up valve remains closed until you connect the drainer.
- 3. TO OPEN VALVE** just thread the drainer onto the FEMCO fitting. Drain hot oil safely and quickly by gravity or suction.