
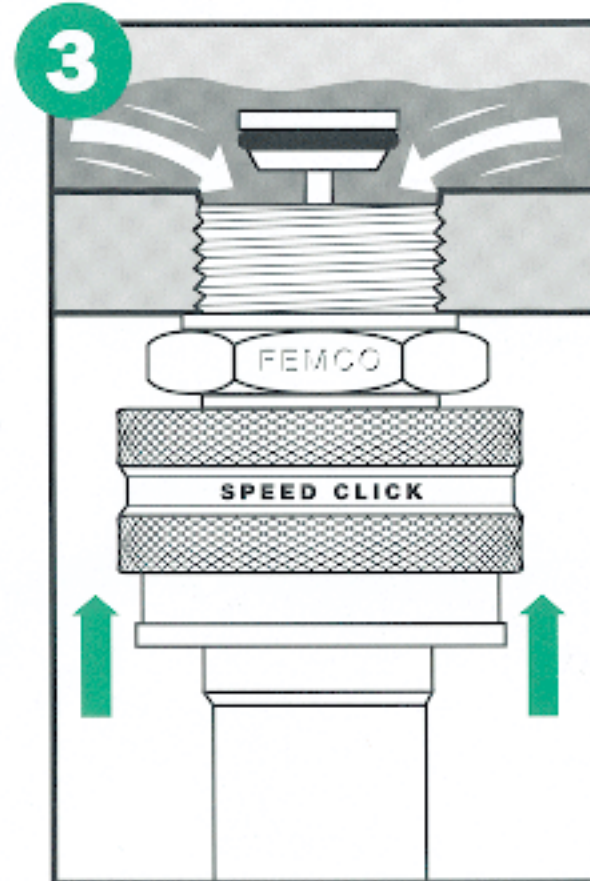
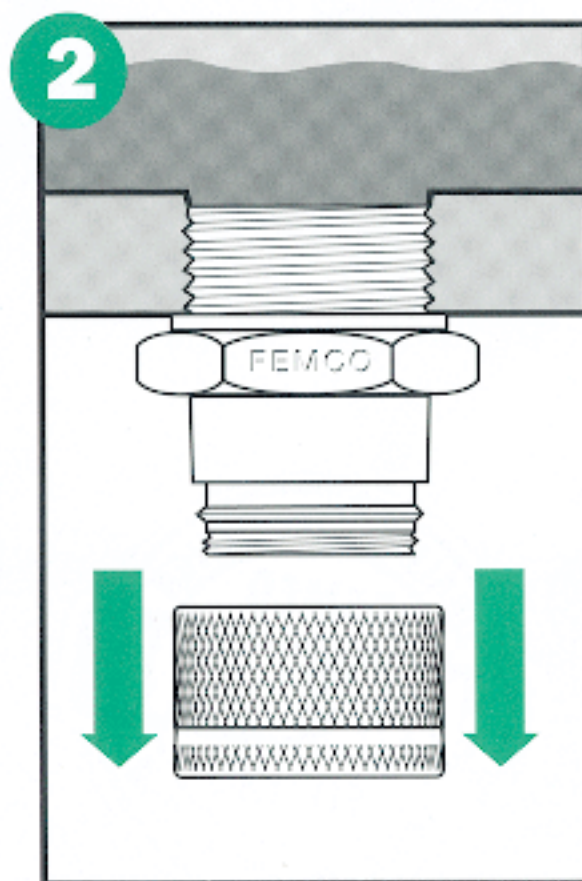


WITH FEMCO SPEED CLICK YOUR NEXT OIL CHANGE IS AS EASY AS 1 - 2 - 3

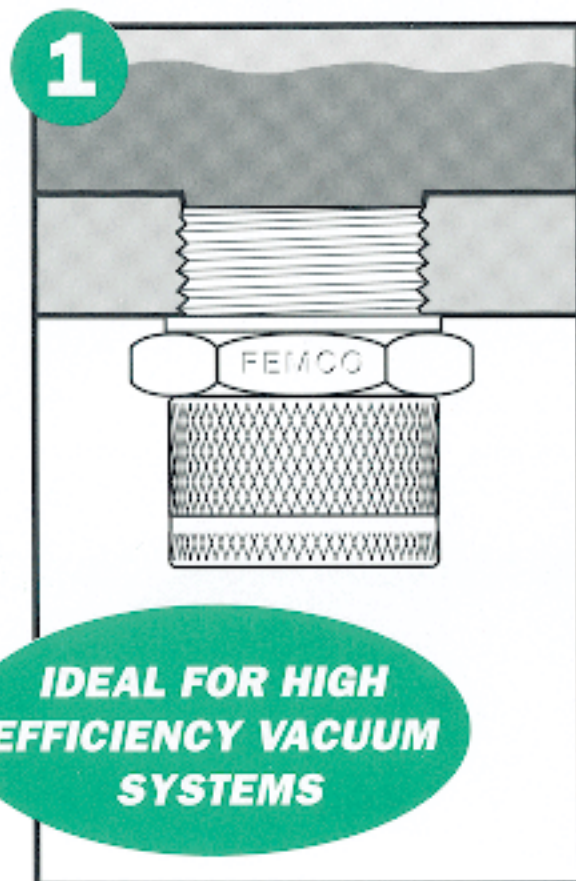

- 1. FEMCO SPEED CLICK FITTING** simply replaces the factory plug. No special tools to install. Dustcap ensures clean, smooth operation
- 2. REMOVE DUST CAP** - the spring - loaded pop-up valve remains closed until you connect the clicker.
- 3. TO OPEN VALVE** - simply push the clicker onto the SPEED CLICK fitting. Drain hot oil safely and quickly by gravity or suction.

** Speed Click is patents pending ** FEMCO is a registered name